Aquafax

TOILET SET UP - CENTRALISED SYSTEM

FOR GENERAL REFERENCE ONLY

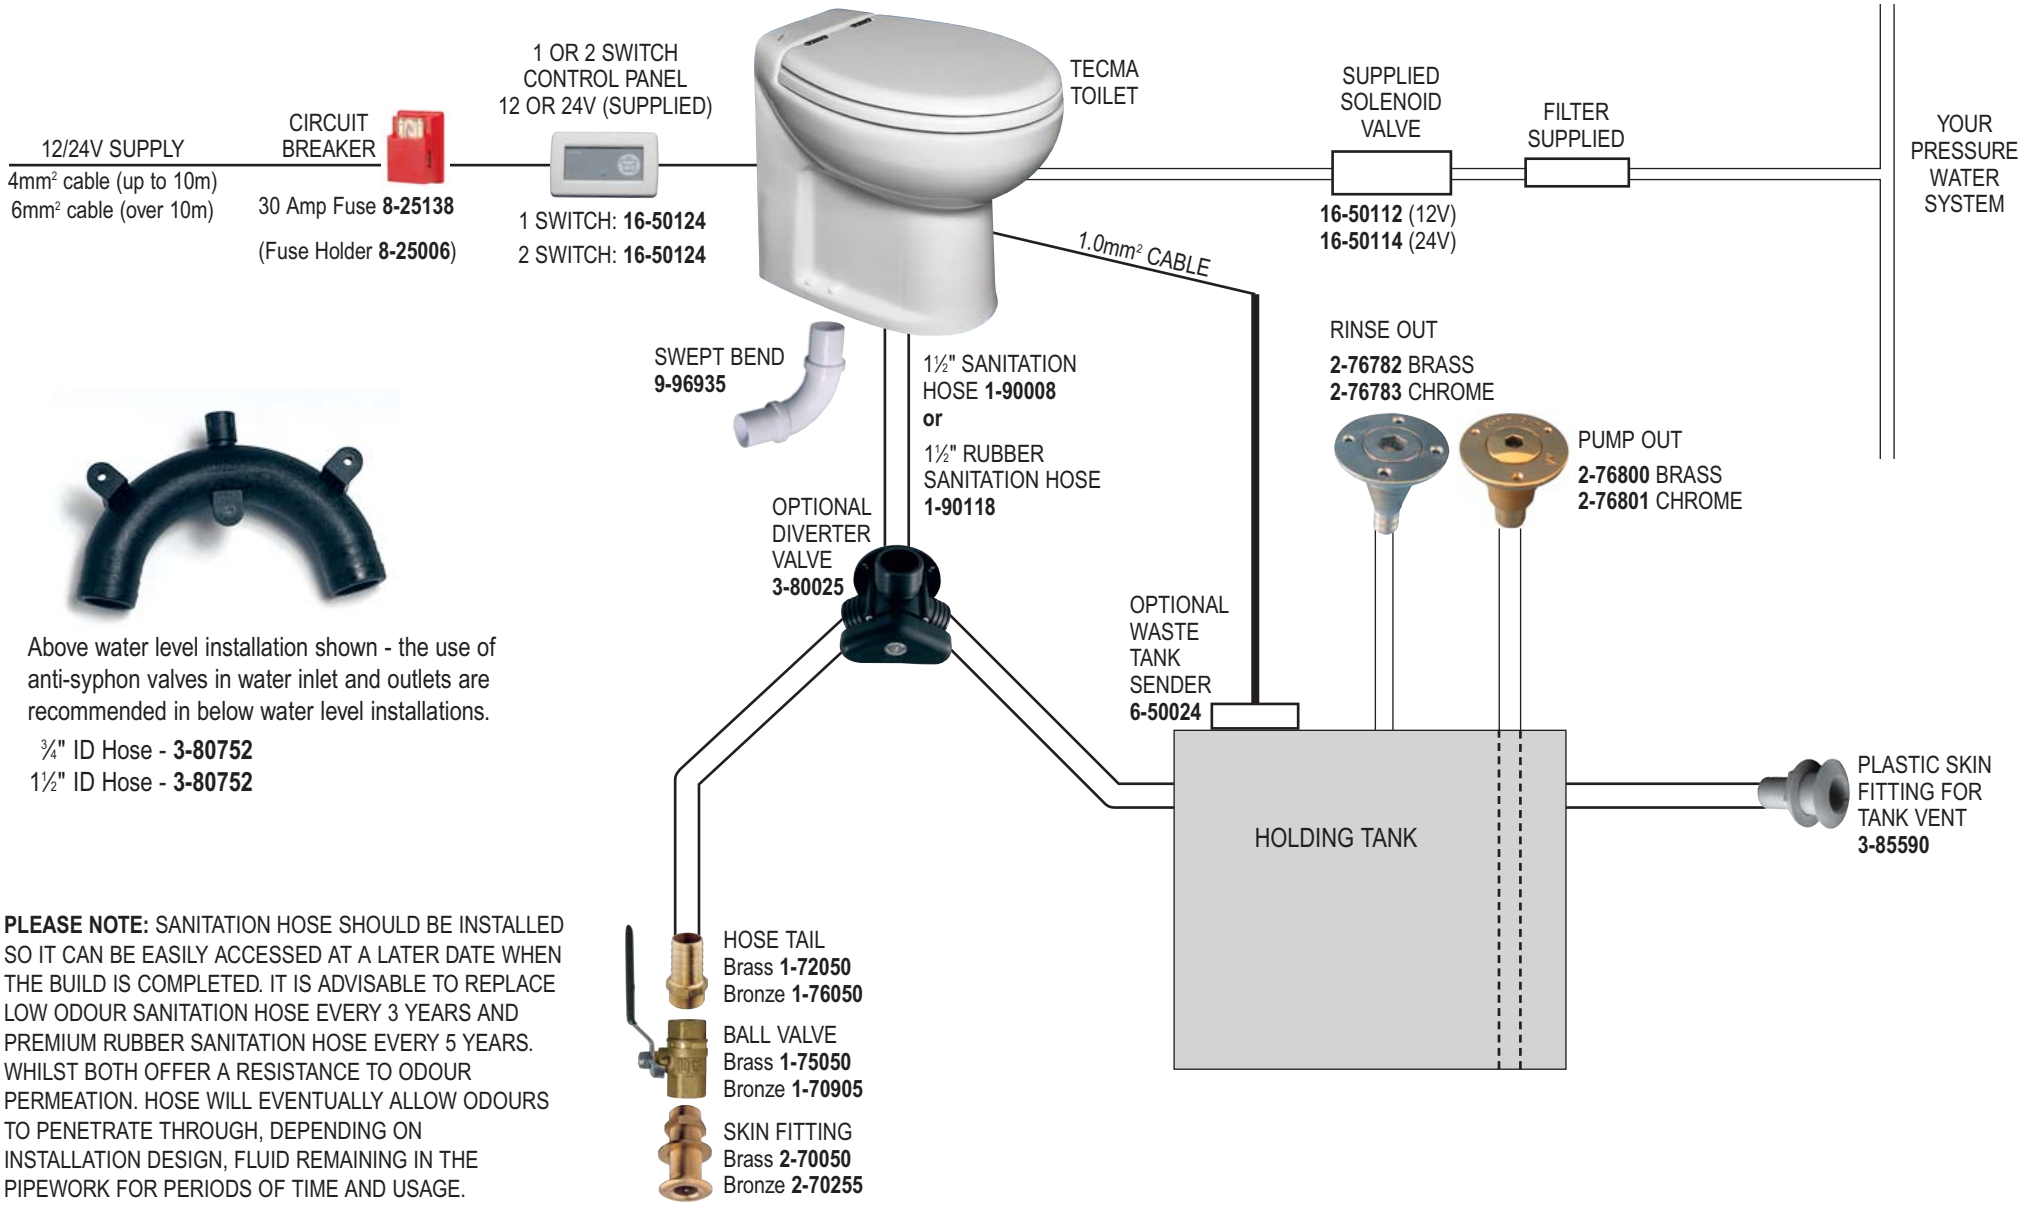

Above water level installation shown - the use of anti-syphon valves in water inlet and outlets are recommended in below water level installations.

¾" ID Hose - **3-80752**
1½" ID Hose - **3-80752**

PLEASE NOTE: SANITATION HOSE SHOULD BE INSTALLED SO IT CAN BE EASILY ACCESSED AT A LATER DATE WHEN THE BUILD IS COMPLETED. IT IS ADVISABLE TO REPLACE LOW ODOUR SANITATION HOSE EVERY 3 YEARS AND PREMIUM RUBBER SANITATION HOSE EVERY 5 YEARS. WHILST BOTH OFFER A RESISTANCE TO ODOUR PERMEATION. HOSE WILL EVENTUALLY ALLOW ODOURS TO PENETRATE THROUGH, DEPENDING ON INSTALLATION DESIGN, FLUID REMAINING IN THE PIPEWORK FOR PERIODS OF TIME AND USAGE.

Aquafax Limited. 14 Dencora Way, Sundon Business Park, Luton, Beds LU3 3HP Tel: (01582) 568700 Fax: (01582) 568720 e-mail: sales@aquafax.co.uk

NOT TO SCALE | 26.03.08